



RoHS

This products can apply to the SWB Doc NO. QA-3-04-005 of Environmental&Material Management Rules

RD-1

Preliminary drawing
This is subject to change without notice


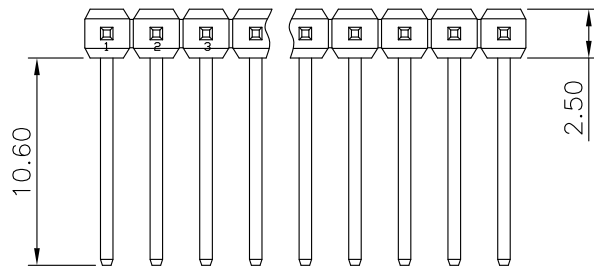


Recommended P.C.B LAYOUT
General Tolerance±0.05



Specifications :

- Voltage rating: 250V Max. AC / DC
- Current rating: 3A Max.AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Material(HOUSE): PA6T
- Plating Code: Underplate: Ni 40~120u"(1~3um)overall
Top plating: matte tin 80~200u"(2~5um)overall

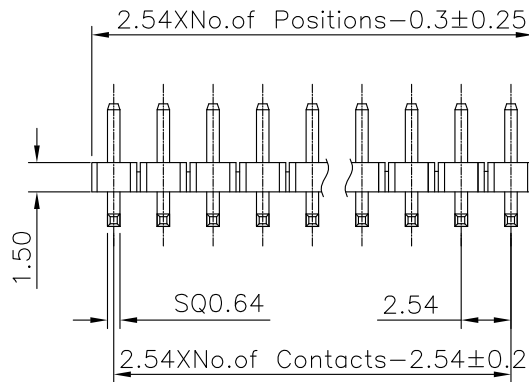

2553 W R - XX - 6T SW1 B B - 01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.:2553
- ② Category:W-wafer
- ③ Connector Type:R-Right Angle 90°
- ④ Row No.-Pin No:XX-0~40Pin
- ⑤ Plastic material:6T- PA6T UL94V-0;
- ⑥ Plating Code:SW1-See remarks
- ⑦ colour: B-Black
- ⑧ Packing: B-Bag
- ⑨ Special code:01-10.6/1.5/3.0mm

					<p>GENERAL TOLERANCE</p> <p>.X ±0.35</p> <p>.XX ±0.10</p> <p>.XXX ±0.05</p> <p>X.° ±2°</p>				<p>东莞市思索连接器有限公司</p> <p>SWB CONNECTORS CO.,LTD</p>				<p>PART NO.</p> <p>2553WR-XX-6TSW1BB-01</p>																																																			
					<p>APPROVAL</p> <p>Jason Huang</p>				<p>CHECK</p> <p>JohnYang</p>				<p>DRAWN</p> <p>Jiang</p>				<p>DATE</p> <p>2021/03/02</p>				<p>TITLE</p> <p>2.54 DIP 90°排针</p>																																											
DATE					REV					ECN NO.					DESCRIPTION					MODIFY					APPROVAL					PROJECT					UNIT					SCALE					SHEET					REV					NUMBER									
1					2					3					4					5					6					7					8					mm					4:1					1/1					1					A-013				