Crimp specification								
Type Document	Crimp Specification	Revised /Edition	А					
Date Issued:	Date Issued: 2022/04/28		2022/04/28					
Subject: 1038T-PV01	Issued By:							
1.00mn	Engineering Dept.							

Description:


Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

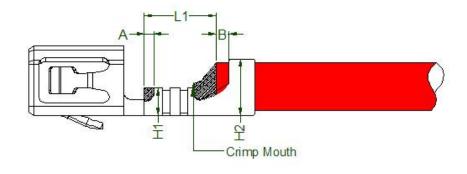



Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification								
Type Document	Crimp Specification	Revised /Edition	A					
Date Issued: 2022/04/28		Data Revised:	2022/04/28					
Subject: 1038T-PV01	Issued By:							
1.00mr	Engineering Dept.							

Requirement:

Subject:UL1571 or equivalent type electric wire									
AWG#	Conductor (mm²)	Insulation Diameter		Insulator skins length (Dim .B) mm		Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out		
#32~#28	0.032mm²~0.08mm²	8.0	0.80mm(max) 0.20mm~0.50mm		0.10mm~0.50mm	1.0mm~1.30mm			
Wire Gauge			imp Area Insu		Insul	ator Crimp Area	Terminal Tensile		
(AWG#)			Height(H1)		Width (W2	Height(H2)	Strength		
#28	0.73±0.03mm		0.51±0.03m	3mm		1.10±0.05mm	1.0kgf		
#30			0.48±0.03m	nm	0.77±0.03mm	0.95±0.05mm	0.50kgf		
#32			0.44±0.03m	nm		0.85±0.05mm	0.30kgf		

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: _______ENG

Dongguan SESO Technology Co.,Ltd