

Crimp specification									
Type Document	Type Document Crimp Specification Revised /Edition								
Date Issued:	2020/11/13	Data Revised:	2020/11/13						
Subject: 1503T-PV01	Issued By:								
1.50mr	Engineering Dept.								

Description:


Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

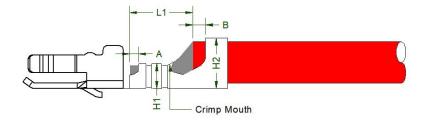



Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification								
Type Document	Α							
Date Issued:	ssued: 2020/11/13 Data Revised:		2020/11/13					
Subject: 1503T-PV01	Issued By:							
1.50mn	Engineering Dept.							

Requirement:

Subject: UL1061 or equivalent type electric wire										
AWG#	Conductor (mm²)	Insulation Diameter		Insulator skins length (Dim .B) mm		Co	pper wire leakage size (Dim .A) mm	Dim. L1 (mm) out		
#28~#24	0.08mm²~0.20mm²	1.1	0mm(max) 0.30mm~0.60mm 0.10mm~		0.10mm~0.40mm	1.30mm~1.60mm				
Wire Gauge	Conduct	Conductor Crimp Area			Insulator Crimp Area		Terminal Tensile			
(AWG#)	Width (W1)		Height(H1)		Width (W2)		Height(H2)	Strength		
24#	1.03±0.03mm		0.65±0.03mm		1.15±0.03mm		1.33±0.05mm	3.0kgf		
26#			0.59±0.03m	nm	1.15±0.0511111		1.28±0.05mm	2.0kgf		
28#			0.55±0.03m	nm	1.13±0.05mm		1.20±0.05mm	1.0kgf		

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: _________ENG

Dongguan SESO Technology Co.,Ltd