Crimp specification				
Type Document				
Date Issued:	2020/11/04			
Subject: 1256TF-H06S-01F			Issued By:	
1.25mm Pitch Terminal crimp specification			Engineering Dept.	

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

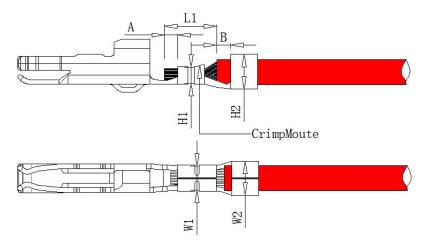

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification					
Type Document					
Date Issued:	2020/11/04				
Subject: 1256TF-H06S-01F			Issued By:		
1.25mm Pitch Terminal crimp specification			Engineering Dept.		

Requirement:

Subject:UL1571 or equivalent type electric wire						
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out	
(#28+#28)~#26	0.128mm~0.16mm²	0.95mm(max)	0.30mm~0.70mm	0.20mm~0.50mm	1.20mm~1.50mm	
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile	
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	Strength	
#28+#28	0.82±0.03mm	0.72±0.03mm	1.00+0.05mm	2.00±0.05mm	1.0kgf	
#26		0.61±0.03mm	T.00±0.05IIIII	1.35±0.05mm	1.50kgf	

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>7%</u> ENG

Dongguan SESO Technology Co.,Ltd

Crimp specification				
Type Document Crimp Specification Revised /Edition A1				
Date Issued:	2024/05/25			
Subject: 1256TLF-H06S-01F			Issued By:	
1.25mm Pitch Terminal crimp specification			Engineering Dept.	

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

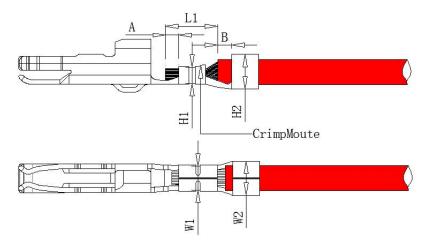

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification					
Type Document Crimp Specification Revised /Edition A1					
Date Issued:	2024/05/25				
Subject: 1256TLF-H06S-01F			Issued By:		
1.25mm Pitch Terminal crimp specification			Engineering Dept.		

Requirement:

Subject:UL1061 or equivalent type electric wire						
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out	
#28~#26	0.08mm²~1.3mm²	1.0mm(Max)	0.30mm~0.70mm	0.20mm~0.50mm	1.20mm~1.50mm	
Wire Gauge	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile	
(AWG#) Width(W1)	Height(H1)	Width (W2)	Height(H2)	Strength		
#28	0.85±0.03mm	0.52±0.03mm	1.0±0.05mm	1.10±0.05mm	1.0kgf	
#26	0.55±0.03mm	1.0±0.05111111	1.20±0.05mm	2.0kgf		

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.
- 3. 26WAG only meets tensile standards.



Crimp specification				
Type Document Crimp Specification Revised /Edition A1				
Date Issued:	2024/05/25			
Subject: 1256TLF-H06S-01F			Issued By:	
1.25mm Pitch Terminal crimp specification			Engineering Dept.	

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2022/09/26	А	Initial Issued	/	Jack Zhang
2024/05/25	A1	Added 2AWG crimping standard	FX	Jack Zhang