



Crimp specification						
Type Document Crimp Specification Revised /Edition A1						
Date Issued: 2020/07/09 Data Revised: 2022/09/02						
Subject:3535TH-PSN	Issued By:					
2.0mm Pitch Terminal crimp specification Engineering Dep						

### Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

### Position Graph:

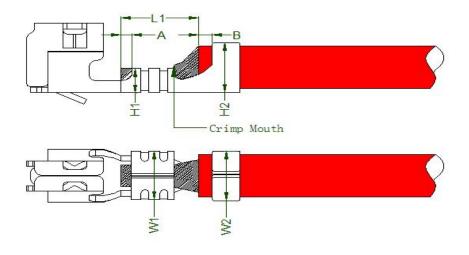

#### Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





Crimp specification						
Type Document Crimp Specification Revised /Edition A1						
Date Issued: 2020/07/09 Data Revised: 2022/09/02						
Subject:3535TH-PSN	Issued By:					
2.0mm Pitch Terminal crimp specification Engineer						

# Requirement:

	Subject:FLRY-A or equivalent type electric wire					
AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out	
#22~#20	0.35mm~0.50mm <sup>2</sup>	1.30mm~1.45mm	0.30mm~0.70mm	0.20mm~0.50mm	1.40mm~1.70mm	
Wire Gauge	auge Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile	
(AWG#)	Width (W1)	Height(H1)	Width (W2)	Height(H2)	Strength	
0.35mm <sup>2</sup>	1.35+0.03mm	0.76±0.03mm	1.60+0.05mm	1.65±0.05mm	50.0N	
0.50mm <sup>2</sup>	1.55±0.0511111	0.84±0.03mm	1.00±0.05mm	1.70±0.05mm	60.0N	

#### Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>FX</u>ENG Dongguan SESO Technology Co.,Ltd





Type Docu Date Issu	led:	Crimp Specification 2020/07/09	Revised /Edition Data Revised:	2022/09/02	
ubject:3535TH-PSN 2.0mm Pitch Terminal crimp specification		Issued By: Engineering Dept.			
Date	REV	DESCRIP	TION	MODIFY	APPROVAL
2020/07/09	A	Initial Issued		/	Kim Huang
2022/09/02	A1	Modify the dimensions of H1 a	nd W1	Feng Xing	Kim Huang





Crimp specification						
Type Document Crimp Specification Revised /Edition A1						
Date Issued: 2020/11/20 Data Revised: 2022/05/19						
Subject:3535T-PSN	Issued By:					
2.0mm Pitch Terminal crimp specification Engineering Dept.						

### Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

## Position Graph:

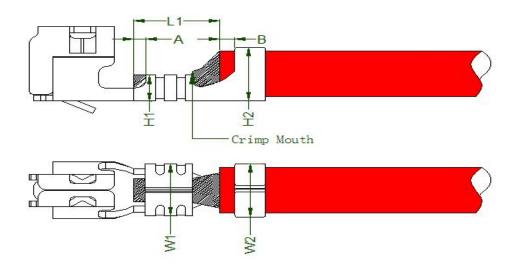

#### Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





Crimp specification						
Type Document Crimp Specification Revised /Edition A1						
Date Issued: 2020/11/20 Data Revised: 2022/05/19						
Subject:3535T-PSN	Issued By:					
2.0mm Pitch Terminal crimp specification Engineering Dep						

# Requirement:

Subject:UL1061 or FLRY-A equivalent type electric wire					
AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#26~#24	0.13mm~0.22mm <sup>2</sup>	1.0mm~1.40mm	0.30mm~0.70mm	0.20mm~0.50mm	1.40mm~1.70mm
Wire Gauge	uge Conductor Crimp Area Insulator Crimp Area		Terminal Tensile		
(AWG#)	Width (W1)	Height(H1)	Width (W2)	Height(H2)	Strength
#26	1.02+0.03mm	0.59±0.03mm	1.45+0.05mm	1.30±0.05mm	13.7N
0.22mm <sup>2</sup>	1.02±0.0311111	0.67±0.03mm	1.45±0.0311111	1.40±0.05mm	40.0N

### Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>7%</u> ENG Dongguan SESO Technology Co.,Ltd