

Crimp specification			
Type Document	Crimp Specification	Revised /Edition	A4
Date Issued:	2021/09/21	Data Revised:	2023/09/19
Subject: 9020TR-BSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

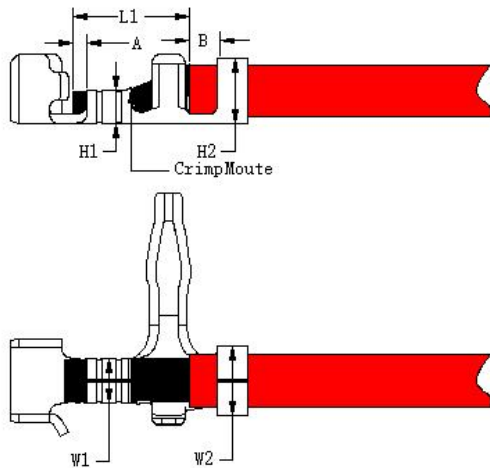

Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A4
Date Issued:	2021/09/21	Data Revised:	2023/09/19
Subject: 9020TR-BSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject:FLRY-A or equivalent type electric wire					
AWG#	Conductor (mm ²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#24~#22	0.22mm ² ~0.35mm ²	1.40mm(max)	0.60mm~1.50mm	0.20mm~0.50mm	1.60mm~2.10mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
0.22mm ²	1.35±0.03mm	0.83±0.03mm	1.70±0.05mm	1.30±0.05mm	30.0N
0.35mm ²		0.87±0.03mm		1.50±0.05mm	50.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: FX ENG

Dongguan SESO Technology Co.,Ltd

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A4
Date Issued:	2021/09/21	Data Revised:	2023/09/19
Subject: 9020TR-BSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2021/09/21	A	Initial Issued	/	Kim Huang
2022/05/19	A1	Modification of tension standard	Feng Xing	Kim Huang
2022/11/25	A2	Modified 0.22 ² tension standard	FX	Kim Huang
2023/07/27	A3	Modifying H1 dimensions	FX	Kim Huang
2023/09/19	A4	Modify B and L1 dimensions and add A control	FX	jack Zhang

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A3
Date Issued:	2021/06/21	Data Revised:	2023/08/25
Subject: 9020TV-BSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

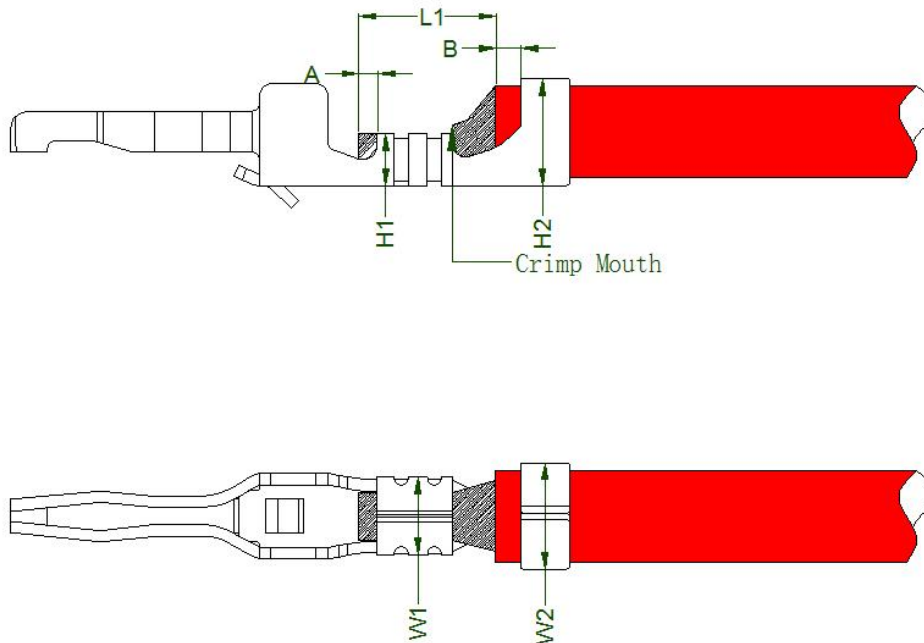

Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A3
Date Issued:	2021/06/21	Data Revised:	2023/08/25
Subject: 9020TV-BSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject:FLRY-A or equivalent type electric wire

AWG#	Conductor (mm ²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
24#~22#	0.22mm ² ~0.35mm ²	1.40mm (max)	0.20mm~0.50mm	0.20mm~0.50mm	1.90mm~2.10mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
0.22mm ²	1.30±0.03mm	0.83±0.03mm	1.55±0.05mm	1.60±0.05mm	30.0N
0.35mm ²	1.35±0.03mm	0.85±0.03mm		1.75±0.05mm	50.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: FX ENG

Dongguan SESO Technology Co.,Ltd

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A3
Date Issued:	2021/06/21	Data Revised:	2023/08/25
Subject: 9020TV-BSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2021/06/21	A	Initial Issued	/	Kim Huang
2022/05/19	A1	Modified 0.22 ² tension standard	FX	Kim Huang
2022/11/25	A2	Modified 0.22 ² tension standard	FX	Kim Huang
2023/08/25	A3	Modifying H1 dimensions	FX	Kim Huang

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A4
Date Issued:	2022/08/08	Data Revised:	2023/09/19
Subject:9020TR-BSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

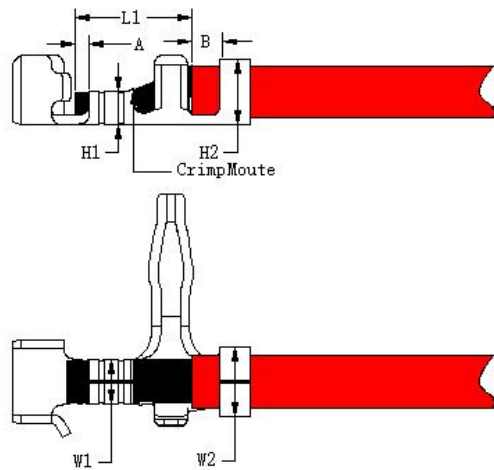

Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A4
Date Issued:	2022/08/08	Data Revised:	2023/09/19
Subject:9020TR-BSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject:UL1061 or FLRYW -A equivalent type electric wire					
AWG#	Conductor (mm ²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#26~#24	0.13mm ² ~0.22mm ²	1.30mm(max)	0.60mm~1.50mm	0.20mm~0.50mm	1.60mm~2.10mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
#26	1.15±0.03mm	0.73±0.03mm	1.65±0.05mm	1.05±0.05mm	14.70N
0.22mm ²	1.25±0.03mm	0.74±0.03mm		1.15±0.05mm	30.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: 7X ENG
Dongguan SESO Technology Co.,Ltd

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A4
Date Issued:	2022/08/08	Data Revised:	2023/09/19
Subject:9020TR-BSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2022/08/08	A	Initial Issued	/	Kim Huang
2022/09/08	A1	Modification of tension standard	Feng Xing	Kim Huang
2022/11/23	A2	Change the dimensions of W1 and H1	FX	Kim Huang
2022/11/25	A3	Modified 0.22 ² tension standard	FX	Kim Huang
2023/09/19	A4	Modify B and L1 dimensions and add A control	FX	Jack Zhang

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A2
Date Issued:	2020/11/02	Data Revised:	2024/05/22
Subject:9020TR-PSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

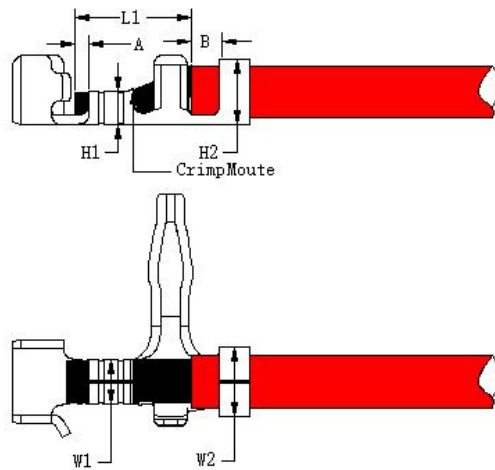

Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A2
Date Issued:	2020/11/02	Data Revised:	2024/05/22
Subject:9020TR-PSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject:UL1061 or equivalent type electric wire					
AWG#	Conductor (mm ²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#26~#22	0.128mm ² ~0.305mm ²	1.00mm~1.40mm	0.60mm~1.50mm	0.20mm~0.50mm	1.60mm~2.10mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
#26	1.25±0.03mm	0.67±0.03mm	1.77±0.05mm	1.25±0.05mm	14.7N
#24		0.71±0.03mm		1.35±0.05mm	30.0N
#22		0.76±0.03mm		1.45±0.05mm	50.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: 7X ENG

Dongguan SESO Technology Co.,Ltd

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A2
Date Issued:	2020/11/02	Data Revised:	2024/05/22
Subject:9020TR-PSN-H 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2020/11/02	A	Initial Issued	/	Kim Huang
2023/09/19	A1	Modify B and L1 dimensions and add A control	Fx	Jack Zhang
2024/05/22	A2	Change tension standard	Fx	Jack Zhang

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2020/11/02	Data Revised:	2024/05/22
Subject:9020TV-PSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

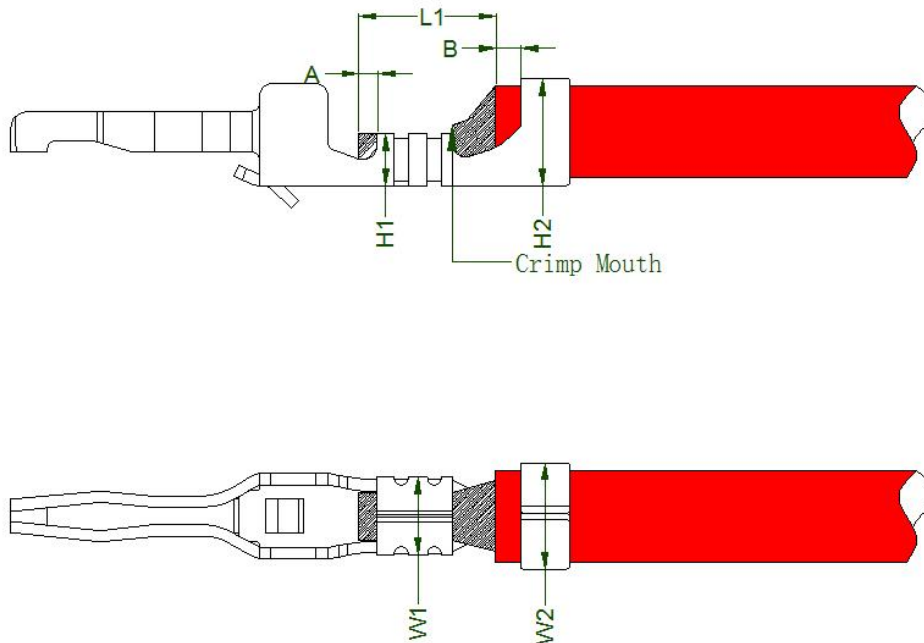

Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2020/11/02	Data Revised:	2024/05/22
Subject:9020TV-PSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject:UL1061 or equivalent type electric wire					
AWG#	Conductor (mm ²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#26~#24	0.128mm~0.205mm ²	1.30mm(max)	0.20mm~0.50mm	0.20mm~0.50mm	1.90mm~2.10mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
#26	1.30±0.03mm	0.68±0.03mm	1.50±0.05mm	1.50±0.05mm	14.7N
#24		0.73±0.03mm		1.60±0.05mm	30.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: FX ENG

Dongguan SESO Technology Co.,Ltd

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2020/11/02	Data Revised:	2024/05/22
Subject:9020TV-PSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2020/11/02	A	Initial Issued	/	Jack Zhang
2024/05/22	A1	Change tension standard	FX	Jack Zhang

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A3
Date Issued:	2020/12/29	Data Revised:	2023/02/23
Subject:9020TV-PSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

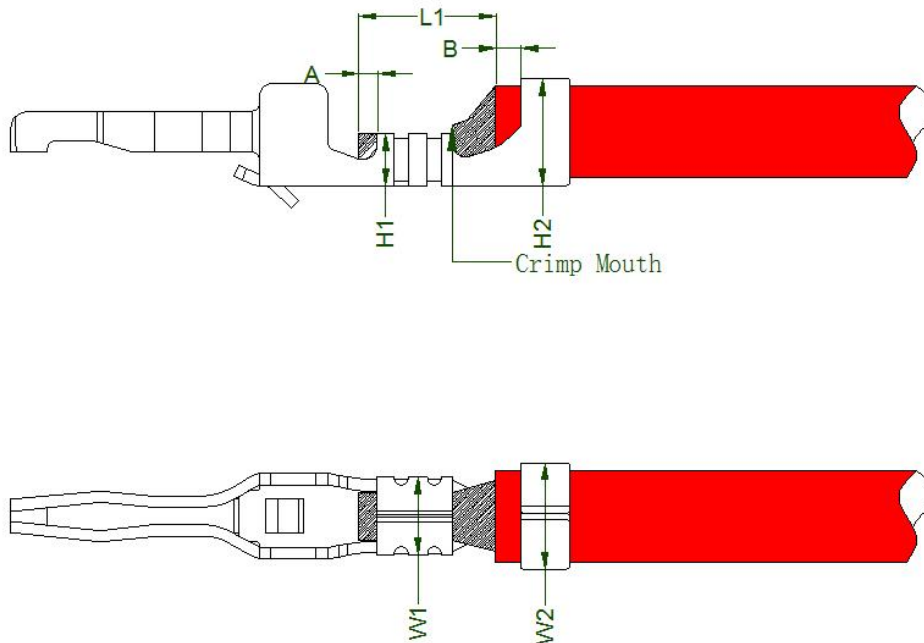

Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A3
Date Issued:	2020/12/29	Data Revised:	2023/02/23
Subject:9020TV-PSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject:FLRY-A or equivalent type electric wire					
AWG#	Conductor (mm ²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#24	0.22mm ²	1.30mm(max)	0.20mm~0.50mm	0.20mm~0.50mm	1.90mm~2.10mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
0.22mm ²	1.28±0.03mm	0.77±0.03mm	1.50±0.05mm	1.60±0.05mm	30.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: FX ENG

Dongguan SESO Technology Co.,Ltd

Crimp specification

Type Document	Crimp Specification	Revised /Edition	A3
Date Issued:	2020/12/29	Data Revised:	2023/02/23
Subject:9020TV-PSN 2.0mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2020/12/29	A	Initial Issued	/	Kim Huang
2022/05/19	A1	Modified 0.22 ² tension standard	FX	Kim Huang
2022/11/25	A2	Modified 0.22 ² tension standard	FX	Kim Huang
2023/02/23	A3	Modify the H2 crimping height	FX	Kim Huang