

Crimp specification				
Type Document	Crimp Specification	Revised /Edition	А	
Date Issued:	2022/04/21	Data Revised:	2022/04/21	
Subject: 0803TH-PSN1 Issued By:				
0.80mm Pitch Terminal crimp specification			Engineering Dept.	

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

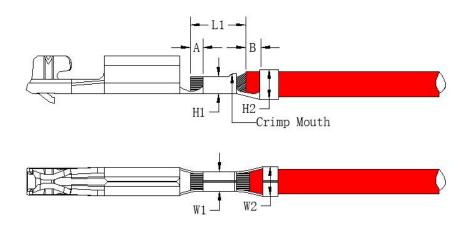

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification			
Type Document	Crimp Specification	Revised /Edition	A
Date Issued:	2022/04/21		
Subject: 0803TH-PSN1	Issued By:		
0.80mr	Engineering Dept.		

Requirement:

Subject:UL1571 or equivalent type electric wire						
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copp	oer wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#28	0.08mm²	0.60mm(max)	0.20mm~0.40mm	0	.20mm~0.40mm	1.10mm~1.40mm
Wire Gauge	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile	
(AWG#)	Width (W1)	Height(H1)	Width (W2)		Height(H2)	Strength
#28	0.62±0.03	0.51±0.03mm	0.62±0.03		0.75±0.05	0.90kgf

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature:	<i>7</i> X	_ENG
Dongguan Si	ESO Technolo	av CoLtd



Crimp specification			
Type Document	Crimp Specification	Revised /Edition	A
Date Issued:	2022/04/21		
Subject: 0803T-PSN1	Issued By:		
0.80mm Pitch Terminal crimp specification			Engineering Dept.

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

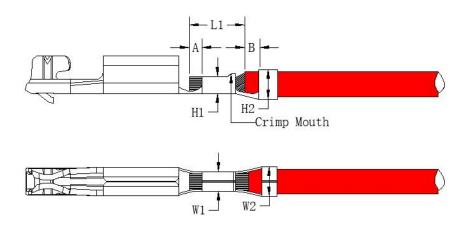

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification				
Type Document	Crimp Specification	Revised /Edition	Α	
Date Issued:	2022/04/21			
Subject: 0803T-PSN1 Issued By:				
0.80mm Pitch Terminal crimp specification Engineering Dept.				

Requirement:

Subject:UL1571 or equivalent type electric wire					
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#32~#30	0.032mm ² ~0.051mm ²	0.60mm(max)	0.20mm~0.40mm	0.20mm~0.40mm	1.10mm~1.40mm
Wire Gauge	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile
(AWG#)	Width (W1)	Height(H1)	Width (W2)	Height(H2)	Strength
#32	0.62±0.03mm	0.41±0.03mm	0.62±0.03mm	0.75±0.05mm	0.45kgf
#30	0.02±0.0311111	0.44±0.03mm	0.02±0.03HIII	0.73±0.03HIII	0.70kgf

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: _	72	ENG
Dongguan SES	O Techno	ology Co. Ltd